
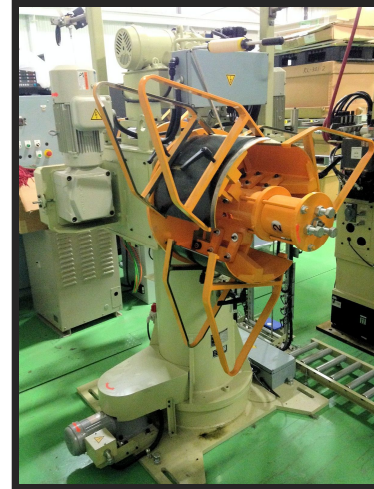


## Kyori Anex-125SH High Speed Knuckle Link Press

New 2013

Nidec Press & Automation Stock #200143P

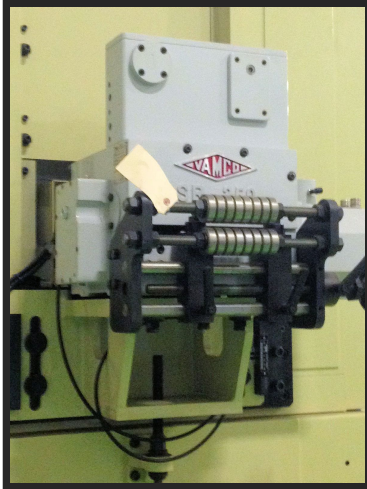

Photo's of actual equipment

### Specifications:

Tonnage: .....137 US / 1250 kN  
 Stroke Length: .....1.18 in. / 30 mm  
 Speed: .....100 - 400 SPM  
 Shut Height: .....16.9 (18.11) in. / 430 (460) mm  
 Slide Adjust: .....3.15 in. / 80 mm  
 Area of Slide: .....42.5 x 23.6 in. / 1080 x 600 mm  
 Area of Bolster: .....47.25 x 35.4 in./ 1200 x 900 mm  
 Bolster Thickness: .....6.3 in. / 160 mm  
 Bed Opening: .....41.33 x 13.7 in. / 1050 x 350 mm  
 Bolster Opening: .....38.6 x 10.24 in. / 980 x 260 mm  
 Main Motor: .....49.6 hp / 37 kW

### Features:

Symmetrical Link Design  
 Link Slide Motion  
 Dynamic Balancer  
 Cast Iron Frame  
 Combination Air Clutch and Brake  
 Motorized Slide Adjustment  
 Recirculating Oil Lubrication System  
 Inverter Type Main Motor  
 Die Doors

### Features, cont'd:

Operator Control Station with 10.4 in. Touch Panel  
 • Speed Meter • Electronic 9-Digit Total Counter  
 • Electronic 9-Digit Preset Counter  
 • Die Height Adjustment Meter  
 • Electronic 7-Digit Hour Meter  
 • Main Motor Function  
 • Tool Parameter Storage Up to 99 Tools  
 • Periodic Maintenance Announcements  
 • Fault History  
 • Automatic Control of Heater/Chiller Unit  
 Quick Access Feature

### Vamco SR-250 Servo Roll Feed

• 9.84 in. / 250 mm Maximum Stock Width  
 • 0.157 / 4 mm Maximum Material Thickness  
 • 500 Indexes per minute

Also includes Matsumoto MMTS-150SP Stock Straightener and LMU25-1WMHRSP Uncoiler.

Note: All specifications contained herein are as the machine was originally manufactured and are subject to change at time of inspection.

**Price, As is where is: ..... On Request**

### Contact:

Richard S. Ruck, Used Equipment Manager  
 860-919-5436 • rich.ruck@minster.com

### Corporate Office

240 West Fifth Street • Minster, OH 45865  
 (419) 628-2331  
[www.nidec-pa.com](http://www.nidec-pa.com)